




## HD 8 VV

HD 8 VV - Articulated tandem roller with 2 vibratory drums



- ▶ Optimum front view due to concaving front end
- ▶ Modern instrument panel
- ▶ Low machine height
- ▶ 3-point swivel joint for optimum driving comfort
- ▶ Central suspension point
- ▶ Clear Side — one-sided drum suspension
- ▶ Low working platform, high stability

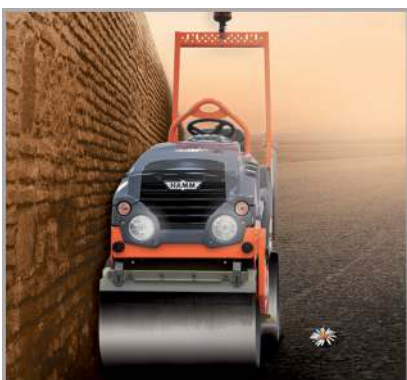

# HD 8 WV

HD 8 WV - Articulated tandem roller with 2 vibratory drums



## HD 8 WV

<b>Weights</b>		
Operating weight with ROPS	kg	1580
Operating weight, max.	kg	1840
Axle load, front/rear	kg	765/815
Static linear load, front/rear	kg/cm	9,6/10,2
French classific., data/class		10,2/PV3
<b>Machine dimensions</b>		
Max. working width	mm	856
Ground clearance, centre	mm	230
Turning radius, inside	mm	2230
Drum type, front		smooth/non-divided
Drum type, rear		smooth/non-divided
Drum thickness, front/rear	mm	12/12
<b>Diesel engine</b>		
Manufacturer		KUBOTA
Version		D1005
Number of cylinders		3
Power rat. ISO 14396, kW/PS/rpm		14,8/20,1/2700
Power rating SAE J1349, kW/HP/rpm		14,8/19,8/2700
Emissions standard EU/USA		- / Tier 4
Fuel tank, capacity	L	33
<b>Drive</b>		
Hydrostatic drive, front/rear		Wheel motor/Wheel motor
Speed, infinitely variable	km/h	0 - 11,0
Climbing ability, vibration on/off	%	30/40
<b>Vibration</b>		
Vibration frequency, front, I/II	Hz	65/52
Vibration frequency, rear, I/II	Hz	65/52
Amplitude, front, I/II	mm	0,50/0,50
Amplitude, rear, I/II	mm	0,50/0,50
Centrifugal force, front, I/II	kN	25/16
Centrifugal force, rear, I/II	kN	25/16
<b>Steering</b>		
Steering, type		Articulated steering
Steering, actuation		hydrostatic, steering wheel
Steering angle +/-	°	33
Oscillation angle +/-	°	8
<b>Sprinkler system</b>		
Water sprinkler, type		Pressure
Actuation, water sprinkler		interval/manual
Water tank, capacity	L	70

### Equipment

Comfort seat with seat belt, Operating hours counter, Indicator lights, Emergency stop switch, Multifunction drive lever to right of seat

### Optional equipment

Lighting as per German Road Traffic Regulations, 2 spotlights on ROPS, Back-up alarm, Rotating beacon, Special colour, Second multifunction drive levers

<b>Total length</b>	<b>L</b>	<b>2260</b>
<b>Width</b>	<b>B</b>	<b>856</b>
<b>Total height</b>	<b>H</b>	<b>2210</b>
<b>Wheel base</b>	<b>A</b>	<b>1560</b>
<b>Drum width</b>	<b>X</b>	<b>800/800</b>
<b>Drum diameter</b>	<b>D</b>	<b>620/620</b>
<b>Height loading, min.</b>	<b>HI</b>	<b>1580</b>

